




Product schematic

# HN

## 3-jaw extra high speed through-hole power chuck(adapter included)

1. Possible 10,000 r.p.m. highest speed chuck.
2. Model HN chucks are assembled with adaptor for ASA B5.9 type A spindles.
3. Model HN chucks are manufactured from high grade alloy steel. All sliding surfaces are hardened and ground for accurate actual running and long service repeatability.

GRIPPING CHARACTERISTIC GRAPH

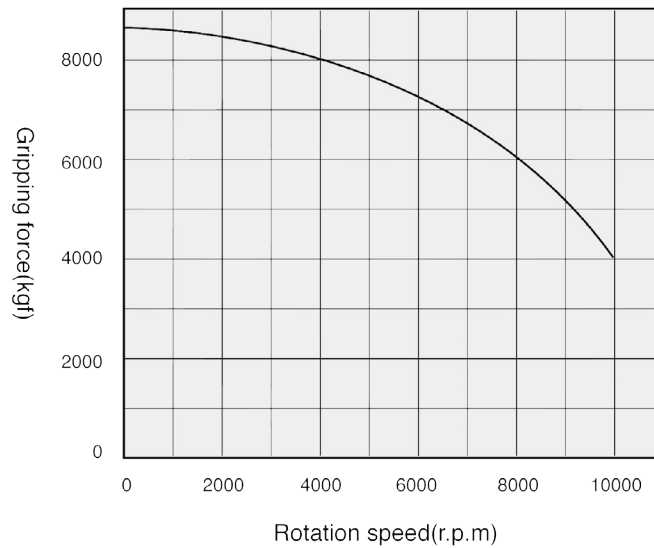

UNIT : mm

SPEC Model	Through-Hole (mm)	Plunger Stroke (mm)	Jaw Stroke (In Dia.) (mm)	Max. Pull Force kN(kgf)	Max. Gripping Force kN(kgf)	Max. Operating Pressure MPa(kgf / cm <sup>2</sup> )	Max. Speed (r.p.m.)	Weight (kg)	Moment Of Inertia I (kg · m <sup>2</sup> )	Matching Cylinder	Matching Soft Jaw	Gripping O. D. Range (mm)
HN-06	Ø36	12	5.5	30(3050)	79.4(8100)	2.9(30)	10000	11.5	0.035	HG-1336	Model-A	Ø14-Ø51